




Entrance, exit and side view of the equipment

Technical data

Working width	Up to 500 mm
Heating configurations	5 heating zones (5 x 2 000 mm)
Speed	Up to 220 m/min (in direct way) Up to 90 m/min (in undirect way)
Temperature	Up to 180 °C
Exemples of bonding fibers	PE, PP, PE/PP, PE/PET, PET/CoPET, PLA/CoPLA, lowmelt fibres
Upstream equipment	Card (in direct way) / Unwinded product Spunbond (in undirect way)
Downstream equipment	Spunbond / engraved calender / hydro-entanglement / Omega oven

Description

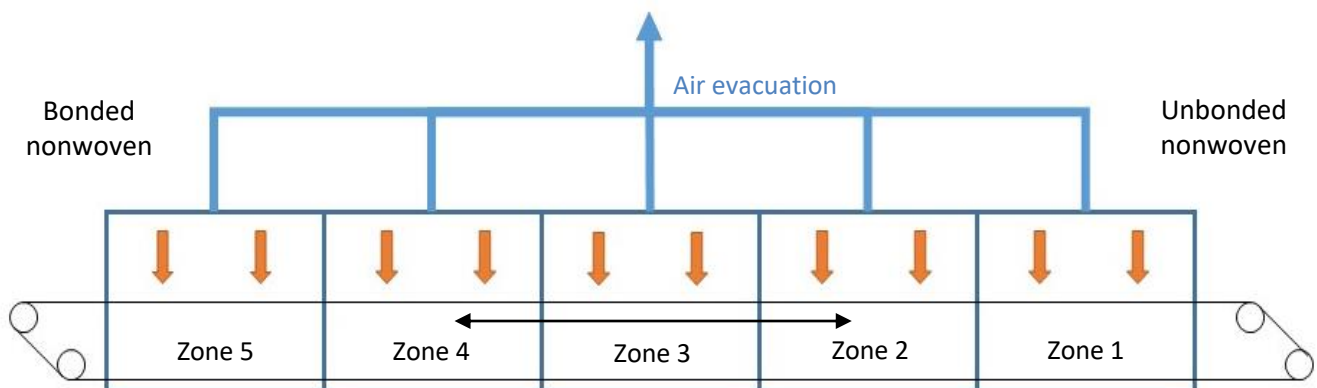

Adjustable air flow speed and air temperature in each zone.

Andritz Equipment