


Spunlaid Pilot Line POST-TREATMENT



Technical data	
Working width	550 mm
Nip pressure	From 20 to 80 N/mm
Product to treat	From 5 to 200 g/m ²
Line speed	From 10 to 200 m/min
Capacity	From 30 to 150 l/h
Up-stream equipment	Card Spunbond Meltblown Unwinded product
Downstream equipment	Omega dryer Winder

Technical data	
Working width	550 mm
Kiss-roll speed	From 2 to 20 m/min
Product to treat	From 5 to 200 g/m ²
Capacity	From 8 to 30 l/h
Line speed	From 10 to 150 m/min
Up-stream equipment	Card Spunbond Meltblown Unwinded product
Downstream equipment	Omega dryer Winder

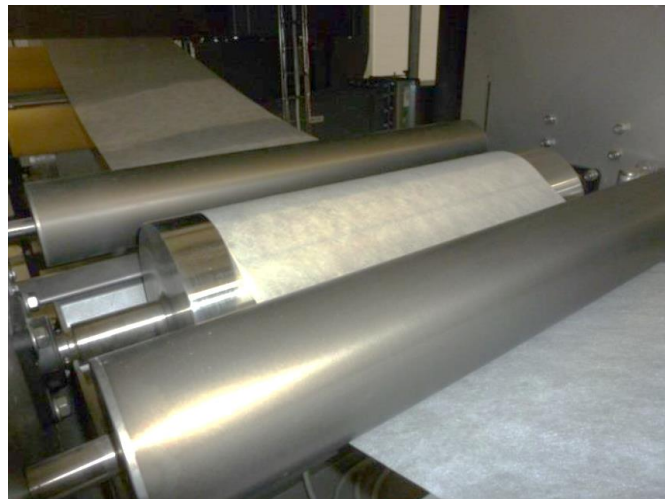